




OVEN TIME AND TEMPERATURE CONTROLLER



Have this manual in your hand using the FG Finder app.

BEFORE INSTALLING THE CONTROLLER, WE RECOMMEND THAT YOU FULLY READ THE INSTRUCTION MANUAL TO PREVENT POSSIBLE DAMAGE TO THE PRODUCT.

THROUGH CONTINUOUS DEVELOPMENT, FULL GAUGE CONTROLS RESERVES THE RIGHT TO CHANGE THIS MANUAL INFORMATION AT ANY TIME WITHOUT PRIOR NOTICE.

THIS CONTROLLER IS NOT RESPONSIBLE FOR SAFETY WITH RESPECT TO ANY FLAME SENSOR, GAS VALVE, OR SPARK IGNITER OF WHICH NEED TO HAVE SAFETY CERTIFICATES (RECOGNIZED IGNITION AND GAS MODULE) IN ITS APPLICATION FOR FINAL USE. THE FLAME SENSOR, THE GAS VALVE OR SPARK IGNITER IN THIS CONTROL WILL BE CONSIDERED SEPARATELY FROM THE THERMON CONTROLLER.

1. DESCRIPTION

Thermostat and timer for forced convection oven automation. The TO-711F provides control of gas, electric or wood-fired ovens, configured through its installation menu. Using the recipe mode, you have 20 settings for temperature control, cooking time and steam injection, making the oven ready for the most varied types of cooking. The TO-711F lets you rotate the turbine rotation direction to improve roast uniformity and when necessary temporarily turn off the turbine with a long key press. The controller features 3 steam injection modes, automatic lighting of the oven, and an internal buzzer that warns, for example, the end of the roast. It also allows the use of external audible alarm and thermal protection temperature sensor of the turbine, which prevents overheating. The ThermOn line was developed and produced as high quality raw material and stands out for its unique and differentiated design, friendly and intuitive interface that facilitates its operation and configuration. Features lockout function prevents third parties from changing parameters, airtight front that offers high protection against dirt, moisture and more.

2. APPLICATIONS


Baking ovens, stoves;

3. TECHNICAL SPECIFICATIONS

Power supply / Approximate consumption	TO711F: 85~240Vac ± 10% (*) / 50-60Hz) / 10VA TO711FL: 12~24Vac/Vdc ± 10% / 10VA
Operating temperature / Control temperature	0 to 131°F (0 to 55°C) / 14 to 932°F (-10 to 500°C)
Temperature sensor	Type J or K thermocouple (sold separately)
Thermal protection sensor	Fan PTC (sold separately)
Resolution	1°C / 1°F
Digital Input Flame sensor	E1: door micro switch input E2: flame sensor input
Relay outputs External audible alarm (buzzer) outputs	7 relay outputs: 5 (3)A / 250Vac 1/8HP 12Vcc / 30mA (max)
Product dimensions / Cutout dimensions (mm)	75 x 75 x 100 (WxHxD) / 67.2 x 67.2
Operating humidity	10 to 90% UR (without condensation)

Ratings outputs for UL Applications		TO711F	TO711FL
Resistance 1 / Gas 1 / Alarm 1	1 A Resistive, 100,000 Cycles 0.5 A Pilot load, 100,000 Cycles	240 Vac	24Vac / Vdc
Resistance 2 / Gas 2 / Alarm 2	1/8 HP, 100,000 Cycles 1 A General purpose, 100,000 Cycles	240 Vac	24Vac / Vdc
Steam valve / Ignition	1/8 HP, 30,000 Cycles 0.5 A Pilot load, 30,000 Cycles	240 Vac	24Vac / Vdc
Lightbulb	1 A General purpose, 100 Cycles 1 A Tungsten, 30,000 Cycles	240 Vac	24Vac / Vdc
Fan 1 / Fan 2	1/8 HP, 30,000 Cycles 0.5 Pilot load, 30,000 Cycles	240 Vac	24Vac / Vdc

4. INTRODUCTION

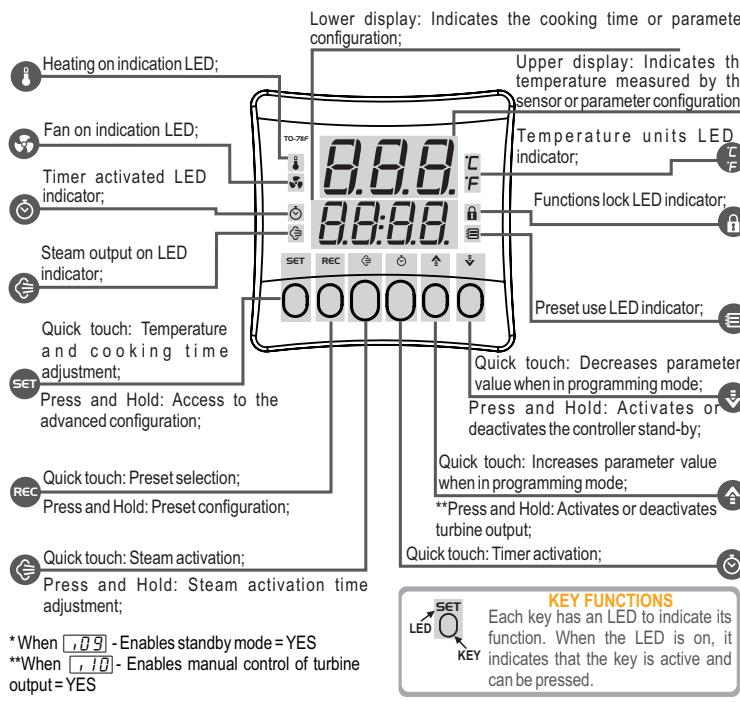

*When **[I-9]** - Enables standby mode = YES

When **[I-10] - Enables manual control of turbine output = YES

5. INSTALLATION CONFIGURATION

F **nc** **E** **d** **1t** Access the installation configuration menu by pressing the **SET** key for 4 seconds until **[Fnc]** is displayed. When **[Lod]** is displayed press the **SET** key again (quick touch). Use the **↑** or **↓** keys to enter the **access code 231** and press **SET** (quick touch) again when ready.

Use the **↑** or **↓** keys to select the desired function. The value can be edited with a quick touch on the **SET** key. Use the **↑** or **↓** to change the value and press the **SET** key with a quick touch when ready to save the configured value and return to the functions menu. To leave the configuration menu and return to the normal operating mode (temperature indication), press **SET** (press and hold) until **[---]** is displayed.

5.1 Installation setup table

FUN	FUNCTION	DESCRIPTION	MIN	MAX	UNIT	DEFA
[Lod] Access Code (231)		Required when you want to change installation setup parameters.	0	9999	-	0
[I-01] Oven type selection		Selects the control type of the oven: ELE = Electric Oven LEN = Gas-fired Oven LEN = Wood-fired Oven	ELE	LEN	-	GAS
[I-02] Temperature sensor type		Defines the type of temperature sensor to be used with the controller.	tc_J	tc_H	-	tc_J
[I-03] Unit selection of temperature		Selects the temperature unit the controller will use for its operation	°C	°F	-	°C
[I-04] Language selection		Selects the language the controller will use to display messages: Portuguese = Portuguese English = English Spanish = Spanish	PORT	ESP	-	PORT
[I-05] Enables external sound alarm(buzzer)		Enables or disables the external audible alarm (buzzer). If enabled, the internal audible alarm (buzzer) will be disabled.	OFF	ON	-	OFF
[I-06] Internal audible alarm (buzzer) volume		Selects the sound intensity of the internal audible alarm (buzzer): Low = low volume Med = medium volume High = high volume	MIN	HIGH	-	HIGH
[I-07] Door digital input signal type		NO - normally open contact (NO) NC - normally closed contact (NC)	NO	NC	-	NO
[I-08] Enable fan thermal protection		If enable, monitors fan temperature. In case of overheating, enters error mode, switching off the outputs of the controller. On = Fan thermal protection enable Off = Fan thermal protection disable.	OFF	ON	-	ON
[I-09] Enables stand-by oven functionality		Enables stand-by mode (switching off control functions)	NO	YES	-	NO
[I-10] Enables manual control of turbine output		Enabled, it allows the turbine output to be deactivated or activated by the user manually, always respecting the times set in parameters [E-25] and [E-26] .	NO	YES	-	YES

6. OPERATION

6.1 Oven: electric

In this operating mode the controller keeps the heating output on until the oven reaches the oven temperature setpoint (SP). The heating output will be activated again when the temperature drops below the setpoint minus the hysteresis **[F04]**.

6.2 Oven: gas

In this operating mode the controller automates / monitors the flame ignition and thus the heating of the oven through the activation of the gas output, ignition module, and flame sensor input. The controller keeps the heating on until the oven reaches the oven temperature setpoint (SP).

Heating will be activated again when the temperature drops below the setpoint minus the Hysteresis **[F04]**. The controller permanently monitors the flame sensor to ensure the safe operation of the gas-fired oven. In this way, if there are any abnormalities, errors **[E-4]** - Flame Sensor shorted with the burner and **[E-5]** - Lack of Flame are indicated. For more information, check item 9 (Signaling).

6.3 Oven: wood

In this operating mode the heating output works as an upper threshold alarm, indicating when the temperature exceeds the value adjusted in Oven Temperature setpoint (SP). The audible alarm is also activated to warn the user about the overheating. The output and audible alarm are switched off when the temperature drops below the oven Temperature setpoint (SP) in the Hysteresis **[F05]** or when the **SET** key in the controller's front panel is pressed.

6.4 Default Mode (standard)

In this operating mode the controller performs the gas type control, however the flame sensor is ignored and the controller will not monitor flame presence. The controller will not detect errors [F₄] - shorted flame sensor and [F₅] - out of gas, resulting in an operating with less safety. **NOTE:** The Default Mode (standard) of operation is available only when the type of oven is adjusted as gas. To execute this operating mode, check item 7.5 Enable Default (standard) Mode of operation.

IN THIS OPERATING MODE THE FLAME SENSOR IS IGNORED AND THE CONTROLLER WILL NOT DETECT THE PRESENCE/LACK OF FLAME, BEING ESSENTIAL FOR THE OPERATOR TO PAY SPECIAL ATTENTION TO THE CONTROL OF THE OVEN IN ORDER TO PREVENT GAS ACCIDENTS.

7. OPERATIONS - BASIC LEVEL

The controller has easy access to resources that are relevant to the user of the oven.

7.1 Adjustment of oven temperature and timer

To adjust oven temperature and timer, perform a quick touch on the **SET** key. Use the **▲** and **▼** keys to adjust the value of the parameter. To advance and/or terminate the adjustment, perform another quick touch on the **SET** key.

ADJUSTMENT OF THE DESIRED TEMPERATURE (SETPOINT) OF THE OVEN:

Defines the working temperature of the oven. This parameter can be adjusted between the values defined in [F₀₂] - Minimum value allowed to configure the oven temperature setpoint and [F₀₃] - Maximum value allowed to configure the oven temperature setpoint.

TIMER ADJUSTMENT:

Defines the cooking time. When the time expires, the audible alarm output is switched on intermittently until any key on the controller's front panel is pressed. The timer can be adjusted between 00:01 and 99:59. The time scale is adjusted in parameter [F₁₄] - Time base of the timer.

7.2 Steam activation

The steam operating mode is defined in parameter [F₁₈] - Steam Operating Mode. Steam activation depends on parameters [F₀₁] - Time interval between steam activations and [F₂₁] - Minimum temperature to activate the steam, available in the advanced configuration menu. These conditions must be met for the injection of steam in the oven to occur.

7.2.1 Steam activation times

Press the **⊖** key and hold for 4 seconds to adjust. Use the **▲** and **▼** keys to adjust the value of the parameter. To confirm, perform a quick touch on the **⊖** key.

FAN CONTROL MODE:

On Selects turbine control mode:
turb [F₀₁] = On, the turbine is controlled by the TURBINE 1 output.
turb [F₀₂] = Alternate, toggles the direction of rotation of the turbine through the TURBINE 1 and TURBINE 2 according to the setting of parameters [F₂₃] and [F₂₄].

Turbine Shutdown Option: If [F₁₀] - Enables Manual Turbine Output Control to be set to "YES", you can temporarily disable the turbine output by pressing **▲** for approximately 2 seconds. The turbine output will remain disabled respecting the time set in function [F₂₅] - Maximum turbine off time after deactivation, allowing the turbine to remain off for 1 to 60 minutes. The turbine can be reactivated at any time by the user by pressing the **▲** key again for 2 seconds.

While the turbine is off, the **⌚** icon will keep flashing on the display. Once the turbine is restarted automatically or by the user, a new shutdown will only be allowed respecting the time set in function [F₂₆] - Minimum turbine on time between manual shutdown to prevent the oven from staying too long with the turbine off. You can set a time of up to 20 minutes or disable this function by moving the setting to the minimum until [no.] appears on the display.

STEAM OUTPUT ON TIME:

This parameter can be adjusted between 1 and 30 seconds, and the factory default is 5 seconds.

STEAM OUTPUT OFF TIME:

This parameter can be adjusted between 1 and 600 minutes, and the factory default is 3 minutes.
NOTE: This parameter is available for adjustment when the steam control mode selected is cyclic [F₁₈]=[CYC].

7.3 Presets

A preset includes the configuration of oven temperature, timer, and steam operating mode. The controller has 20 presets that can be edited by the user, and the presets can be selected in a simplified way.

7.3.1 Preset selection

To select a preset in the controller, perform a quick touch on the **REC** key and then use **▲** or **▼** to select the desired preset.
REC - QUICK TOUCH: cancel preset selection;
REC - PRESS AND HOLD: confirm preset selection;
The **⌚** icon indicates that the preset mode is active.

7.3.2 Preset configuration

To access the preset configuration menu, keep the **REC** key pressed down for 4 seconds. Then use **▲** or **▼** to select the parameter to be adjusted, use the **REC** key to access the parameter, and then use **▲** or **▼** to adjust the value of the parameter. To leave the preset menu and return to the normal operating mode (temperature and time indication), keep the **REC** key pressed down (press and hold) until [---] is displayed.

7.3.2.1 Preset configuration table

FUN	FUNCTION	DESCRIPTION	MIN	MAX	UNIT	DEFA
[F ₀₁ F]	Select the preset to be configured	Selects the number of the preset to be configured. There are 20 presets that can be customized by the user.	1	20	-	1
[F ₀₂ P]	Oven temperature setpoint for the selected preset	Adjustment of the oven temperature setpoint for the preset selected by parameter (F02) (F03) [F ₀₁ F].	°C (°F)	180 (356)		
[F ₀₃ T]	Timer adjustment for the selected preset	Adjustment of the timer for the preset selected by parameter [F ₀₁ F].	00:01	99:59	F14	18:00
[F ₀₄ R]	Steam operating mode for the selected preset	Defines the steam operating mode for the selected preset [F ₀₁ F]: OFF : Off: does not inject steam. MAN : Manual: injects steam when the ⌚ key is pressed. AUT : Automatic: automatically injects steam after the timer is activated. The steam OFF CYC - MAN is activated after the time set in F19 has elapsed. CYC : Cyclic: injects steam in cycles using the times configured in [F ₀₅ R] and [F ₀₆ F].				

7.4 Bloqueio de funções

To enable / disable the function lock, press **▲** and **▼** and hold for the time configured in parameter [F₂₈] - Time for function lock.

LOCK
On

When this configuration is active, the parameters cannot be changed, but they can be viewed. When the lock is active, the parameters available for adjustment are defined in parameter [F₂₇] - Functions Lock.

Icon **LOCK** indicates the status of the lock. Icon lit indicates the functions lock is active.

7.5 Enable Default (standard) operating mode

DEF
E IPO

To enable the Default (standard) operating mode of the oven, the controller must be powered up with the **⊖** and **⊖** keys pressed until the message appears on the display. This mode is available when the type of oven selected is GAS. For more details about this operating mode check item 6.4 Default Mode (standard).

IN THIS OPERATING MODE THE FLAME SENSOR IS IGNORED AND THE CONTROLLER WILL NOT DETECT THE PRESENCE/LACK OF FLAME, BEING ESSENTIAL FOR THE OPERATOR TO PAY SPECIAL ATTENTION TO THE CONTROL OF THE OVEN IN ORDER TO PREVENT GAS ACCIDENTS

7.6 STAND-BY Function

When function [F₀₉] - Enable stand-by oven functionality is set to YES, the controller can be put on standby at any time by the user. This functionality allows for the control to be kept disable (all outputs off). To put the controller on stand-by mode, press **⊖** for approx. 4 seconds, until the message [F₀₇F] is displayed. While the controller is on stand-by, the display will flash the **⊖** key icon to indicate for the key to be pressed again for 4 seconds to reactivate the oven control.

8. OPERATIONS - ADVANCED LEVEL

8.1 Changing the controller parameters

Fnc
Ed It

Access the advanced configuration menu by pressing the **SET** key for 4 seconds until [F₀₆F] is displayed. When [F₀₁D] is displayed press the **key** again (quick touch). Use the **▲** or **▼** keys to enter the access code 123 and press **SET** (quick touch) again when ready.

8.2 Parameters table

FUN	FUNCTION	DESCRIPTION	MIN	MAX	UNIT	DEFA
[F ₀₁ D]	Access Code (123)	Required when you want to change the advanced configuration parameters.	0	9999	-	0
[F ₀₂ O]	Temperature sensor indication offset	Allows compensating deviations in the sensor temperature reading.	-20 (-4)	20 (36)	°C (°F)	0 (0)
[F ₀₃ O]	Minimum value allowed to configure the oven temperature setpoint	These parameters serve as the lower and upper thresholds for the adjustment of parameter "SP" - oven temperature (14) setpoint. They are used to block temperature adjustments and to avoid an improper configuration for the operation of the oven.	-10 (-10)	10 (10)	°C (°F)	0 (32)
[F ₀₄ O]	Maximum value allowed to configure the oven temperature setpoint	The temperature difference to switch on the heating output. This function allows defining a temperature interval within which the heating output will remain off.	500 (932)	230 (446)	°C (°F)	3 (446)
[F ₀₅ O]	Oven temperature differential (Hysteresis)	Defines the delay to switch off the temperature control when the door of the oven is opened	1 no(0)	20 180	sec.	3 90
[F ₀₆ O]	Number of attempts to light the flame (GAS-FIRED OVEN)	Defines the maximum number of attempts the controller will try to ignite the flame. After using up all attempts, the controller will signal error [F ₀₅ F]-Out of Gas. Note: This parameter is used when the type of oven selected is GAS.	1	5	-	3
[F ₀₇ O]	Ignition output on time (GAS-FIRED OVEN)	Defines the time the ignition output will stay switched on to try to ignite the flame. Note: This parameter is used when the type of oven selected is GAS.	1	15	sec.	3
[F ₀₈ O]	Interval between activations of the ignition output (GAS-FIRED OVEN)	Defines the interval between attempts to activate the flame. Note: This parameter is used when the type of oven selected is GAS	1	15	sec.	3
[F ₀₉ O]	Delay to activation of the ignition output after controller start up (GAS-FIRED OVEN)	Defines the delay to activate the ignition output after the gas output is activated in the first attempt to ignite the flame. This time is used so that the gas from the cylinder reaches the burner and then the ignition is activated. Note: This parameter is used when the type of oven selected is GAS.	no(0)	15	sec.	no(0)
[F ₁₀ O]	Delay of the temperature control after controller start up (GAS-FIRED OVEN)	When the controller is powered up, the fan is activated first and then the flame ignition process commences after the time adjusted in this parameter has elapsed. Note: This parameter is used when the type of oven selected is GAS.	no(0)	30	sec.	1

Fun	Function	Description	Min	Max	Unit	Defa	Fun	Função	Descrição	Mín	Máx	Unid	Padr
F11	Delay of the temperature control (GAS-FIRED OVEN)	When the controller tries to ignite the flame, for example after the door is opened, the fan is activated first and then the flame ignition process commences after the time adjusted in this parameter has elapsed. Note: This parameter is used when the type of oven selected is GAS.	no (0)	30	sec.	5	F25	Maximum turbine off time after shutdown	Determines the maximum time each turbine output will remain disabled after manual shutdown (if F11 is set to YES). Note: The turbine can be manually rewired by the user at any time.	1	60	min.	20
F12	Timer trigger mode	Defines the timer triggering mode: MAN = Manual, through the Ø key. START = Start up, when the controller is powered up. TEMP = Temperature, when the oven working temperature is reached. Note: In modes START and TEMP the Ø key only cancels the timer.	MAN	TEMP	-	MAN	F26	Minimum turbine on time between new manual shutdown:	Allows you to set the minimum turbine on time before performing a new manual shutdown. This way the user can only turn off the turbine after the time set in this function has elapsed. To disable this function, move the setting to the minimum until no appears on the display.	no (0)	20	min.	10
F13	Timer counting direction	Defines the direction the timer counts: DEC = time count down; CRE = time count up;	DEC	CRE	-	DEC	F27	Functions lock	Defines the functions lock mode: OFF = functions lock disabled; LOC1 = partial functions lock 1 - prevents advanced configuration parameters from being changed; LOC2 = partial functions lock 2 - prevents controller parameters from being changed, only allowing changing presets; FULL = full functions lock, does not allow any parameter adjustment.	OFF	FULL	-	LOC1
F14	Timer time base	Defines the time base of the timer: MM:SS = minutes, maximum time 99:59 minutes; HH:MM = hours, maximum timer 99:59 hours.	MM:SS	HH:MM	-	MM:SS	F28	Timer for function lock	Defines the time to lock / unlock the functions. For more information, see item 7.4 - Functions Lock.	1	30	sec.	10
F15	Timer reset mode	Defines the timer reset mode, essentially whether the audible alarm will be switched off manually or by time: MAN = Manually through the Ø key; AUT = Automatically according to the time defined in parameter F17 ; Note: The timer also resets when the door of the oven is opened, independently of the mode defined in this parameter.	MAN	AUT	-	MAN	9. SIGNALING	9.1 Operating mode signaling	Upon power up the controller indicates the operating mode of the oven.				
F16	Timer reset time base	Defines the time base when the timer is reset: MM:SS = minutes, maximum time 99:59 minutes; HH:MM = hours, maximum time 99:59 hours.	MM:SS	HH:MM	-	MM:SS	ELE	Electric Oven	Controller configured with the electric oven logic.				
F17	Time to reset the timer (auto mode)	Defines the time to reset the timer if automatic reset is selected in parameter F15 .	0:01	99:59	F16	0:05	GAS	Gas-fired Oven	Controller configured with the gas-fired oven logic.				
F18	Steam working mode	Defines the steam operating mode for the selected preset F18 : OFF Off: does not inject steam. MAN Manual: injects steam when the Ø key is pressed. AUT Automatic: automatically injects steam after the timer is activated. The steam is activated after the time set in F19 has elapsed. CYC Cyclic: injects steam in cycles using the times configured in URA and URB . Note: When the preset mode is active, this configuration is made in menu F18 .	OFF	CYC	-	MAN	LEN	Wood-fired Oven	Controller configured with the wood-fired oven logic.				
F19	Delay to activate the automatic steam	Defines the delay before injecting steam into the oven after the timer is activated. This parameter is valid when automatic steam is adjusted in parameter F18 .	1	999	sec.	5	DEF	Default Mode (standard)	Controller configured with gas-fired oven logic with Default (standard) mode enabled, without flame sensor monitoring. For more information, see item 7.5 Enable Default (standard) operating mode.				
F20	Time interval between steam activations	Defines the minimum time interval between steam activations, i.e. once the steam output is activated, the controller will not activate it again before the time adjusted in this parameter has elapsed. To disable this function, change the adjustment to the minimum until no is displayed. Note: This parameter is disregarded when the type of steam selected is cyclic.	no(0)	30	min.	no(0)	LOC	Functions lock active	Does not allow adjusting the parameter To deactivate functions lock, see item 7.4 - Functions lock.				
F21	Minimum temperature to activate the steam	Defines the minimum temperature in the oven to allow activating the steam output. To disable this function, change the adjustment no(14) (932) (°F) (212) to the minimum until no is displayed.	no(0)	500	°C	100	no	Parameter adjustment denied	Enter access code in parameter cod to adjust the parameter value.				
F22	Economic mode - oven idle time to switch of the light	Defines the time the oven has to be idle before the controller enters in Economic Mode (ECO). When the lightbulb output is switched off. Press SET to leave the ECO mode.	no(0)	60	min.	15	EAS	Receiving data via EasyProg* (programming key)	Updating the parameter table via EasyProg*. *sold separately				
F23	Fan output on time	Defines the time the fan will stay active in each direction.	60	600	sec.	180	Er1	Measure:	Contact Full Gauge Controls.				
F24	Fan output off time	It must be adjusted with the time required for the fan to stop, so that the rotation reversion can be performed smoothly.	5	30	sec.	15	Er2	Measure:	Contact Full Gauge Controls.				
							Er3	Reason:	Temperature sensor disconnected or out of range. Measure: Check sensor connections and operation.				
							Er4	Reason:	Flame sensor shorted with the burner. Measure: Check whether the flame sensor is making contact with the burner.				

E-5**GAS**

Reason: Out of gas, the controller does not detect a flame.
Measure: First check if there is gas available for the oven to operate.
Check the presence of flame and the distance between the flame sensor and the burner. Other possibilities for this failure are: flame sensor disconnected or dirty / oxidized, damaged ignition module or gas valve.

E-6

Reason: Fan overheating, its temperature has exceeded the rated temperature of the thermal protection PTC sensor.
Measure: Check the operation of the fan and respective temperature sensor.
Note: If the thermal protection sensor is not used, connect terminals 3 and 4 with a connection and/or deactivation parameter **[108]** - **Enable fan thermal protection.**

9.4 Other signaling

ECD

Controller in Economic mode. The controller was idle for the time adjusted in **[F22]** - **Economic Mode**. To leave this mode, press **SET** or open the oven door.
Note: This message is displayed alternately with the oven temperature.

trb

Manual turbine shutdown not allowed.
The message will be displayed when the time set in function **[F26]** is not respected before performing a new shutdown.

trb

Performed manual shutdown of the turbine.

trb

Performed manual reclosing of the turbine.

OPEN door

Indica que a porta do forno está aberta.
Obs.: a mensagem ficará ciclante no display inferior.

CLOSE THE door

Requests for the operator to close the oven door. Indicates that the door remained open for the time configured in parameter F05. In this mode the controller switches off the heating and activates the audible alarm.
Note: The message keeps flashing on the lower display.


10. INSTALLATION

10.1 Electrical connections


PRECAUTIONS WHEN INSTALLING THE PRODUCT:

- Before performing any procedure on this instrument, disconnect it from the power grid;
- Ensure that it has adequate ventilation, avoid installation on control panels containing devices that could cause it to operate outside its specified temperature range;
- Install the product away from sources that may generate electromagnetic disturbances, such as: motors, contactors, relays, solenoid valves, etc.

10.1.1 Oven: electric

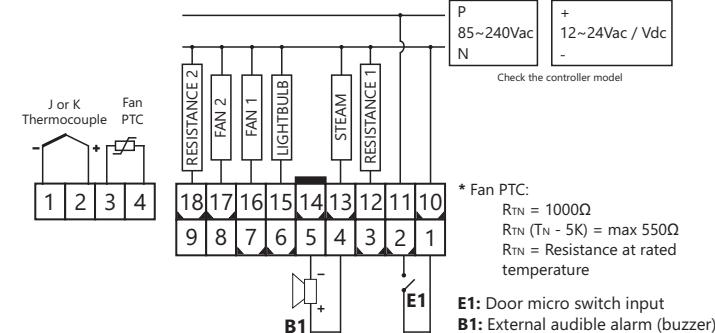


10.1.2 Oven: gas

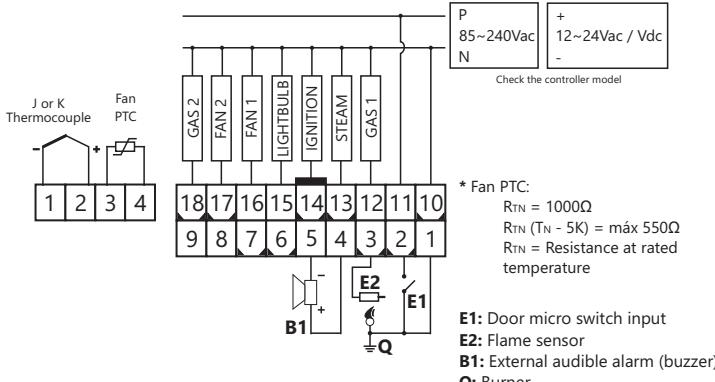

IMPORTANT:


- It is crucial to install the ignition module next to the burner and as far as possible from the electronic controller;
- The ignition electrode must be installed at a distance of 5 mm from the burner;
- The flame sensor must be installed at a distance of 5 mm from the burner and at least 5 mm from the ignition electrode.

10.1.3 Oven: wood

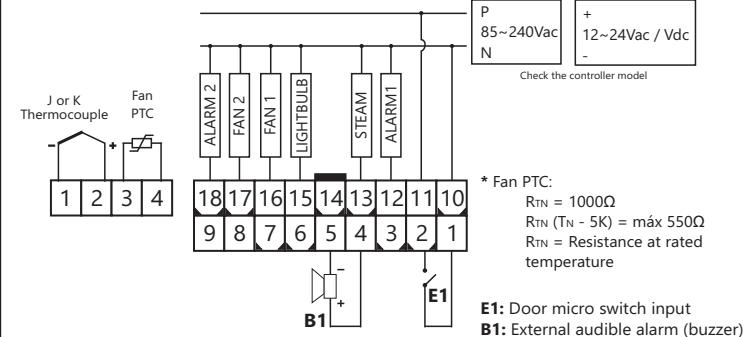


11. DIMENSIONS


Front view



Side view



Panel openings



12. EasyProg* - version 02 or later

It is an accessory the main function of which is to store the parameters of controllers. At any time you can load new parameters of a controller and unload them on a production line (of the same controller), for example.

It is provided with three types of connections for loading or unloading the parameters:

- Serial RS-485:** It is connected via RS-485 network to the controller (only for those controllers provided with RS-485).
- USB:** It is connected to the computer via USB port, using the Sitrad Preset Editor.
- Serial TTL:** The controller may be connected directly to EasyProg via Serial TTL connection.



ENVIRONMENTAL INFORMATION

Packaging:

Materials used in the packaging of the Full Gauge products are 100% recyclable. Be sure to dispose of using specialized recycling facilities.

Product:

The components used in the Full Gauge controllers may be recycled and reused if disassembled by specialized companies.

Disposal:

Do not incinerate or dispose of the controllers that reached the end of their service life in household waste. Be sure to comply with the existing legislation in your area relating to disposal of electronic waste. In the event of doubt, please contact Full Gauge Controls.

WARRANTY - FULL GAUGE CONTROLS

Products manufactured by Full Gauge Controls, as of May 2005, have a two (2) - year warranty directly with the factory and one (1) year before the reseller network, counted as of the date of consigned sale as stated on the invoice. After this said year before the reseller network, the warranty shall continue to be executed if the instrument is sent directly to Full Gauge Controls. The products are warranted in case of defects in workmanship making them unsuitable or inadequate to the intended applications. The warranty is limited to maintenance of instruments manufactured by Full Gauge Controls, disregarding other kinds of expenses, such as indemnity for damages caused to other equipment.

EXCEPTIONS TO WARRANTY

The Warranty does not cover expenses incurred for freight and / or insurance for sending the products with signs of defect or malfunctioning to the provider of technical support services. The following events are also excluded from warranty: natural wear and tear of parts, external damages caused by falls or inadequate packaging of products.

VALIDATION OF WARRANTY

The product warranty shall lose validity, automatically, if:

- The instructions for use and assembly contained in the technical description and the installation procedures described in Standard NBR5410 are not followed;

- The product is submitted to conditions beyond the limits specified in its technical description;

- The product is violated or repaired by a person not integrating the technical team of Full Gauge;

- The damages are due to a fall, blow and / or impact, water damage, overload and / or atmospheric discharge.

USE OF WARRANTY

For use of the warranty, the customer should send the adequately packaged product, along with the respective Invoice to Full Gauge Controls. The customer will bear the freight cost for sending of the products. Also, as much information as possible with regard to the defect verified should be sent, in order to facilitate the analysis, the testing and the performance of the service.

These processes and any product maintenance shall only be performed by the Technical Support Services of Full Gauge Controls, at the Company headquarters - Street Júlio de Castilhos, 250 - CEP 92120-030 - Canoas - Rio Grande do Sul - Brazil.